


SAN Cora[®]

WE COLOUR THE WORLD

T

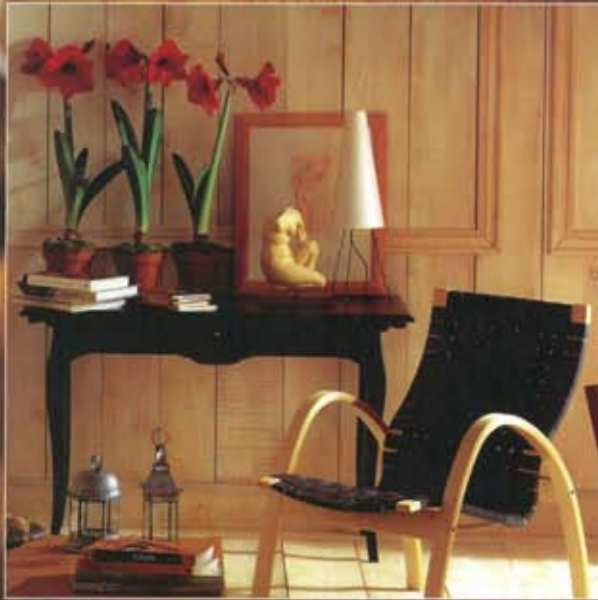

TIMBER@Guard

Polyurethane wood stain

SOLAR@Skin

Exterior UV Protection wood varnish (Solvent Base)

TIMBER@Shade

Exterior UV Protection Wood & Galvanised Finish (Water Base)



Golden Bull Award 2003, 2004 & 2007
Malaysia 100 Outstanding SMEs

*Exterior UV Protection wood
varnish (Solvent Base)*



SS 14337 Rosewood



SS 14338 Antique



SS 16325 Honeypine



SS 14331 Walnut



SS 16601 Gold Bar



SS 12701 Arabian Dust



SS 12493 Mahogany




SS 12702 Maple Brownie



SS 10484 Ebony



SS 11698 Antique Jade

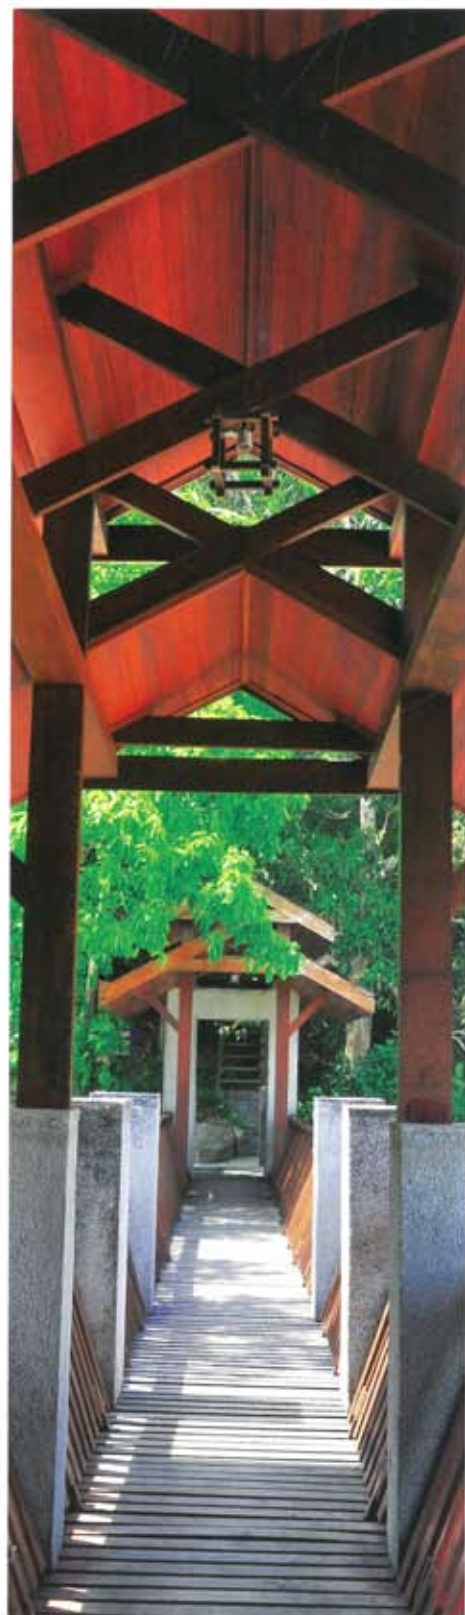

DESCRIPTION

SANcora® SOLAR@Skin is specially formulated exterior translucent wood varnish using modified alkyd for decoration as well as protection on the wood surfaces that apply on. It gives an extremely durable and flexible finish with excellent abrasion resistance and will not peel, crack or blister.

USAGE

Recommended for use on all kind exterior wood surfaces or structure.

PACK SIZE

1 litre and 5 litres.

COMPOSITION

- Pigment - Lightfast Non-Lead Transparent Pigment
- Binder - Modified Alkyd
- Vehicle/Solvent - White Spirit

TECHNICAL DATA

- Texture - High Gloss Smooth Finish
- Colour - A wide range of colours. Please refer to **SANcora®** SOLAR@Skin colour card
- Theoretical Coverage - Approx. 13 - 15m² / litre (Depending on surface evenness)
- Drying Time - Single coat on standard thickness
 - Surface Dry : ≤ 3 hours
 - Hard Dry : ≤ 5 hours
- Recommended Recoating Time - ≥ 5 hours
- Thinner/Cleaner - White Spirit

APPLICATION

- Brush/Roller - For normal use, thinning is not necessary. If required, add up to 5 - 10% by volume with Mineral Spirit.
- Conventional Air Spray - Thin 10% by volume with Mineral Spirit and adjust to requirement.
- Airless Spray - Ready for use.

SURFACE PREPARATION

General / New Wood

Surfaces must be sound, clean, dry and free from all defective or poorly adhering material, dirt, grease or wax. To have better finish, rubbed down surface in the direction of the grain using suitable abrasive and dust off. If necessary, fill wood grain with appropriate filler and smoothen with abrasive. Allowed paint to dry and lightly dry sand between 1st and 2nd coat.

Previously Painted Wood

Remove all loose, defective, unstable and existing paint film to bare wood. Rubbed down surface in direction of the grain. If necessary, apply wood grain filler to fill the crack and smoothen with abrasive. Seal the surfaces with **SANcora®** SOLAR@Skin. Thin down with 10 - 20% mineral spirit.

PAINT GUIDE

Surface Condition	Primer - To Paint One Coat	Finishing - To Paint Two Coats
General / New Wood	SANcora® SOLAR@Skin Note: thin down with 10 - 20% mineral spirit	SANcora® SOLAR@Skin
Previously Painted Surfaces	SANcora® SOLAR@Skin Note: thin down with 10 - 20% mineral spirit	SANcora® SOLAR@Skin



PERSONAL PRECAUTIONS

Avoid contact with eyes or skin as this product may cause irritation. In case of eye contact, flush with sufficient clean water and consult a physician immediately. Keep out of reach of children. Refer to Material Safety Data Sheet for complete product safety information.

SHELF LIFE

2 years at ambient temperature in unopened containers.

WARRANTIES

- **SANcora®** warrants that its products will conform and perform in accordance with the product technical data sheet.
- **SANcora®** also warrants its products to be free from defects in material and handling.
- **SANcora®**'s liability to any consumer or any third party for any loss or damage shall not exceed replacement cost, excluding freight and handling of material proven to be defective.
- **SANcora®** agrees to respond to claims of defective material only upon receipt of written notification and verification of product defects. Any claim must be within 5 (five) days of the discovery of the defect. In no event **SANcora®** shall be liable for any consequential or incidental damage or loss of profit.
- **SANcora®** is not liable for variation due to environment, application, colour or changes in procedure, which may cause unsatisfactory results.

PERSONAL PRECAUTIONS

Avoid contact with eyes or skin as this product may cause irritation. In case of eye contact, flush with sufficient clean water and consult a physician immediately. Keep out of reach of children. Refer to Material Safety Data Sheet for complete product safety information.

SHELF LIFE

2 years at ambient temperature in unopened containers.

WARRANTIES

- **SANcora®** warrants that its products will conform and perform in accordance with the product technical data sheet.
- **SANcora®** also warrants its products to be free from defects in material and handling.
- **SANcora®**'s liability to any consumer or any third party for any loss or damage shall not exceed replacement cost, excluding freight and handling of material proven to be defective.
- **SANcora®** agrees to respond to claims of defective material only upon receipt of written notification and verification of product defects. Any claim must be within 5 (five) days of the discovery of the defect. In no event **SANcora®** shall be liable for any consequential or incidental damage or loss of profit.
- **SANcora®** is not liable for variation due to environment, application, colour or changes in procedure, which may cause unsatisfactory results.

For further information or if you have any inquiry about this product, please contact the Sales Department at the address below :-

THE MARK OF QUALITY

MS ISO 9001 : 2000 Quality Management Systems Certification By :-



Paint Manufacturer

SYARIKAT SANLAND PAINT INDUSTRIES SDN BHD (19733-T)

Paint Distributor

SANCORA PAINTS MARKETING SDN BHD (716878-P)

Lot 8206, Kawasan Perusahaan Kamunting, 34600 Kamunting, Perak, Malaysia.

Tel : +605-891 8777 (8 lines) Fax : +605-891 2277

Website : www.sancora.com Email : info@sancora.com

www.facebook.com/WeLoveColours

The information contained herein is subject to change as may be required by the company without any further notice.