


T

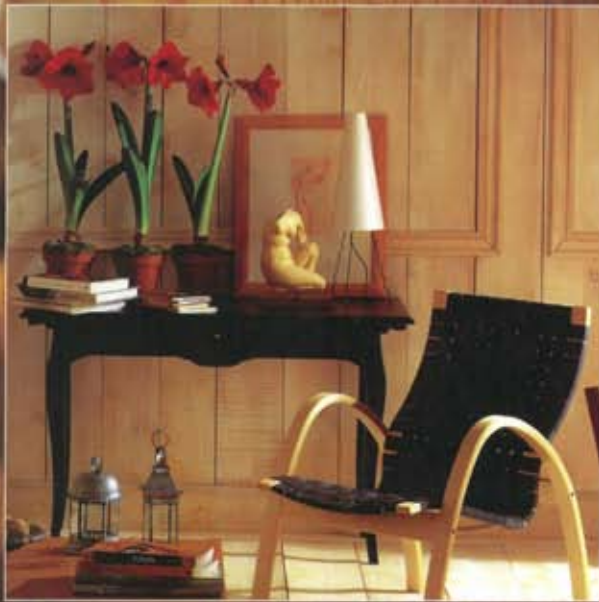

TIMBER@Guard

Polyurethane wood stain

SOLAR@Skin

Exterior UV Protection wood varnish (Solvent Base)

TIMBER@Shade

Exterior UV Protection Wood & Galvanised Finish (Water Base)



TIMBER@Guard *Interior Wooden Surfaces*



TG 105 RUST



TG 101 MERANTI



TG 107 REDWOOD



TG 104 TEAK



TG 108 ROSEWOOD



TG 109 JUNIPER



TG 103 GOLDEN PINE



TG 110 CHARCOAL



TG 106 BEECH



TG 120 MAROON



TG 102 MAHOGANY



TG 100 CLEAR



TG 111 SATIN

Final color tone will depend on the type of wood applied on.



DESCRIPTION

SANcora® TIMBER@Guard Polyurethane Wood Stain is specially formulated to enhance the natural beauty of wood and protects it against wood rot and mould growth by its penetrative properties. It is suitable for use on all types of new or previously treated interior hard and soft woods. It gives an extremely durable and flexible finish with excellent abrasion resistance and will not peel, crack or blister.

USAGE

Recommended for use on cane or wooden furniture, door paneling, partition and parquet flooring.

PACK SIZE

1 litre and 5 litres.

COMPOSITION

Pigment	- Lightfast Non-Lead Transparent Pigment
Extender	- None
Binder	- Modified Polyurethane
Additives	- Unleaded Driers & etc
Vehicle/Solvent	- Aliphatic & Aromatic Hydrocarbon

TECHNICAL DATA

Texture	- High Gloss Smooth Finish
Colour	- A wide range of colours. Please refer to SANcora® TIMBER@Guard colour card
Fineness	- ≤ 15 microns
Specific Gravity	- 0.88 - 0.93 (Depending on colours)
Viscosity	- 45 - 55 KU/27 C
Theoretical Coverage	- Approx. 16 - 18m ² / litre (Depending on surface evenness)
Opacity	- Not Applicable
Gloss	- $\geq 90\%$
Drying Time	- • Surface Dry : ≤ 3 hours • Hard Dry : ≤ 8 hours
Recommended Recoating Time	- 6 hours
Thinner/Cleaner	- Mineral Spirit

APPLICATION

Brush/Roller	- For normal use, thinning is not necessary. If required, add up to 5 - 10% by volume with Mineral Spirit.
Conventional Air Spray	- Thin 10% by volume with Mineral Spirit and adjust to requirement.
Airless Spray	- Ready for use.

SURFACE PREPARATION

General / New Wood

Surfaces must be sound, clean, dry and free from all defective or poorly adhering material, dirt, grease or wax. To have better finish, rubbed down surface in the direction of the grain using suitable abrasive and dust off. If necessary, fill wood grain with appropriate filler and smoothen with abrasive. Allowed paint to dry and lightly dry sand between 1st and 2nd coat.

Previously Painted Wood

Remove all loose, defective, unstable and existing paint film to bare wood. Rubbed down surface in direction of the grain. If necessary, apply wood grain filler to fill the crack and smoothen with abrasive. Seal the surfaces with **SANcora®** TIMBER@Guard Polyurethane Wood Stain. Thin down with 10 - 20% mineral spirit.

PAINT GUIDE

Surface Condition	Primer - To Paint One Coat	Finishing - To Paint Two Coats
General / New Wood	SANcora® TIMBER@Guard Polyurethane Wood Stain Note: thin down with 10 - 20% mineral Spirit	SANcora® TIMBER@Guard Polyurethane Wood Stain
Previously Painted Surfaces	SANcora® TIMBER@Guard Polyurethane Wood Stain Note: thin down with 10 - 20% mineral Spirit	SANcora® TIMBER@Guard Polyurethane Wood Stain

PERSONAL PRECAUTIONS

Avoid contact with eyes or skin as this product may cause irritation. In case of eye contact, flush with sufficient clean water and consult a physician immediately. Keep out of reach of children. Refer to Material Safety Data Sheet for complete product safety information.

SHELF LIFE

2 years at ambient temperature in unopened containers.

WARRANTIES

- **SANcora®** warrants that its products will conform and perform in accordance with the product technical data sheet.
- **SANcora®** also warrants its products to be free from defects in material and handling.
- **SANcora®**'s liability to any consumer or any third party for any loss or damage shall not exceed replacement cost, excluding freight and handling of material proven to be defective.
- **SANcora®** agrees to respond to claims of defective material only upon receipt of written notification and verification of product defects. Any claim must be within 5 (five) days of the discovery of the defect. In no event **SANcora®** shall be liable for any consequential or incidental damage or loss of profit.
- **SANcora®** is not liable for variation due to environment, application, colour or changes in procedure, which may cause unsatisfactory results.

For further information or if you have any inquiry about this product, please contact the Sales Department at the address below :-

THE MARK OF QUALITY

MS ISO 9001 : 2000 Quality Management Systems Certification By :-



Paint Manufacturer
SYARIKAT SANLAND PAINT INDUSTRIES SDN BHD (19733-T)

Paint Distributor
SANCORA PAINTS MARKETING SDN BHD (714878-P)

Lot 8206, Kawasan Perusahaan Kamunting, 34600 Kamunting, Perak, Malaysia.
Tel : +605-891 8777 (8 lines) Fax : +605-891 2277
Website : www.sancora.com Email : info@sancora.com



www.facebook.com/WeLoveColours