


T

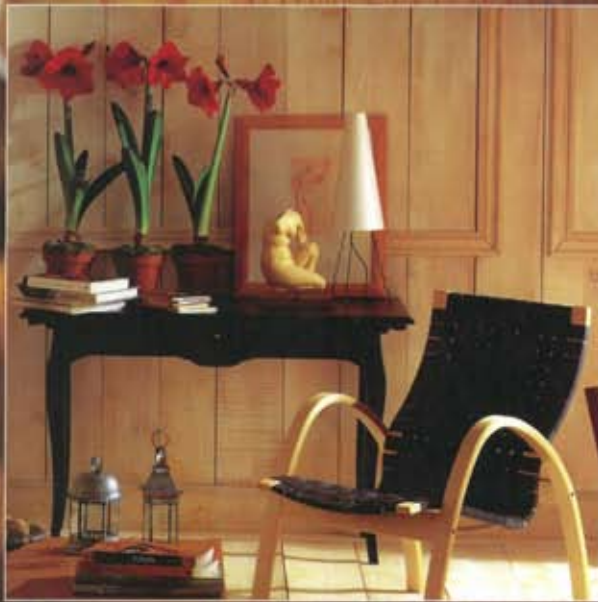

TIMBER@Guard

Polyurethane wood stain

SOLAR@Skin

Exterior UV Protection wood varnish (Solvent Base)

TIMBER@Shade

Exterior UV Protection Wood & Galvanised Finish (Water Base)



TIMBER@Shade *Exterior Wooden & Galvanised Surfaces*



Ash Grey TS 10526



Bedford TS 134A




Riverbed TS 12242



Graystone TS 4012T



Cane TS 16348



Rustic TS 12243



Crushed Rock TS 4015P




Sedona Clay TS 174A



Red Wood TS 12241



Folkstone TS 4245P



Aztec TS 5083D



Mission Brown TS 12239

Exterior UV Protection wood & Galvanised finish (Water Base)



Tigerstripe TS 214A



Harvest Orange TS 213A



Robust Red TS 222A



Blue Thunder TS 202A



Lush Green TS 64A



Knockout Red TS 261A



Silhouette Grey TS 4223D



Black Night TS 164A



DESCRIPTION

SANcora® TIMBER@Shade is a high quality acrylic emulsion base paint design for direct application to wood surfaces. It is suitable for use in interior and exterior wood surfaces with the purpose of decoration or protection of the wood surfaces.

USAGE

Recommended for use on exterior wood surfaces such as wooden fence, wood walls, cladding and etc.

PACK SIZE

1 litre and 5 litres.

COMPOSITION

Pigment - Lightfast Non-Lead Pigment and Mineral Extender
Binder - Acrylic Emulsion
Vehicle/Solvent - Water

TECHNICAL DATA

Texture - Low Sheen Finish
Colour - A wide range of colours. Please refer to **SANcora®** TIMBER@Shade colour card
Theoretical Coverage - Approx. 11 - 13m² / litre (Depending on surface evenness)
Drying Time - Single coat on standard thickness
• Surface Dry : ≤ 45 min
• Hard Dry : ≤ 2 hours
Recommended Recoating Time - ≥ 2 hours
Thinner/Cleaner - Water

APPLICATION

Brush/Roller - For normal use, thinning is not necessary. If required, add up to 5 - 10% by volume with water.
Conventional Air Spray - Thin 10% by volume with water and adjust to requirement.
Airless Spray - Ready for use.

SURFACE PREPARATION

General / New Wood
Surfaces must be sound, clean, dry and free from all defective or poorly adhering material, dirt, grease or wax. To have better finish, rubbed down surface in the direction of the grain using suitable abrasive and dust off. If necessary, fill wood grain with appropriate filler and smoothen with abrasive. Allowed paint to dry and lightly dry sand between 1st and 2nd coat.

Previously Painted Wood
Remove all loose, defective, unstable and existing paint film to bare wood. Rubbed down surface in direction of the grain. If necessary, apply wood grain filler to fill the crack and smoothen with abrasive. Seal the surfaces with **SANcora®** TIMBER@Shade. Thin down with 10 - 20% water.

PAINT GUIDE

Surface Condition	Primer - To Paint One Coat	Finishing - To Paint Two Coats
General / New Wood	SANcora® TIMBER@Shade Note: thin down with 10 - 20% water.	SANcora® TIMBER@Shade
Previously Painted Surfaces	SANcora® TIMBER@Shade Note: thin down with 10 - 20% water.	SANcora® TIMBER@Shade



PERSONAL PRECAUTIONS

Avoid contact with eyes or skin as this product may cause irritation. In case of eye contact, flush with sufficient clean water and consult a physician immediately. Keep out of reach of children. Refer to Material Safety Data Sheet for complete product safety information.

SHELF LIFE

2 years at ambient temperature in unopened containers.

WARRANTIES

- **SANcora®** warrants that its products will conform and perform in accordance with the product technical data sheet.
- **SANcora®** also warrants its products to be free from defects in material and handling.
- **SANcora®**'s liability to any consumer or any third party for any loss or damage shall not exceed replacement cost, excluding freight and handling of material proven to be defective.
- **SANcora®** agrees to respond to claims of defective material only upon receipt of written notification and verification of product defects. Any claim must be within 5 (five) days of the discovery of the defect. In no event **SANcora®** shall be liable for any consequential or incidental damage or loss of profit.
- **SANcora®** is not liable for variation due to environment, application, colour or changes in procedure, which may cause unsatisfactory results.

For further information or if you have any inquiry about this product, please contact the Sales Department at the address below :-

THE MARK OF QUALITY

MS ISO 9001 : 2000 Quality Management Systems Certification By :-



Paint Manufacturer
SYARIKAT SANLAND PAINT INDUSTRIES SDN BHD (19733-T)

Paint Distributor
SANCORA PAINTS MARKETING SDN BHD (716878-P)
Lot 8206, Kawasan Perusahaan Kamunting, 34600 Kamunting, Perak, Malaysia.
Tel : +605-891 8777 (8 lines) Fax : +605-891 2277
Website : www.sancora.com Email : info@sancora.com

www.facebook.com/WeLoveColours

The information contained herein is subject to change as may be required by the company without any further notice.